


QUICK COUPLER

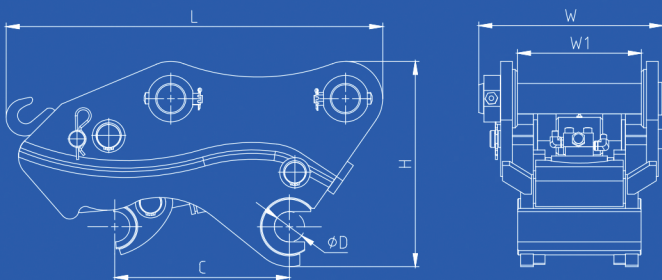

FQC02	
Length (L)	370-420 mm
Height (H)	355-300 mm
Width (W)	150-200 mm
Pin Center (C)	85-180 mm
Arm Width (W1)	90-120 mm
Pin Diameter (D)	Φ25-Φ30 mm
Operating Pressure	30-150 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	20-30kg
Suitable Carrier	1-2 ton

FQC03	
Length (L)	400-450 mm
Height (H)	230-280 mm
Width (W)	210-250 mm
Pin Center (C)	170-245 mm
Arm Width (W1)	110-160 mm
Pin Diameter (D)	Φ30-Φ40 mm
Operating Pressure	30-150 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	35-50kg
Suitable Carrier	2.5-4 ton

FQC04	
Length (L)	550-590 mm
Height (H)	300-380 mm
Width (W)	240-310 mm
Pin Center (C)	245-300 mm
Arm Width (W1)	150-230 mm
Pin Diameter (D)	Φ40-Φ50 mm
Operating Pressure	30-150 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	60-80kg
Suitable Carrier	5-6 ton

FQC05	
Length (L)	610-650 mm
Height (H)	310-390 mm
Width (W)	300-385 mm
Pin Center (C)	290-360 mm
Arm Width (W1)	220-280 mm
Pin Diameter (D)	Φ50-Φ60 mm
Operating Pressure	30-150 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	90-120kg
Suitable Carrier	7-10 ton

FQC06	
Length (L)	800-860 mm
Height (H)	415-510mm
Width (W)	360-420 mm
Pin Center (C)	350-420 mm
Arm Width (W1)	250-320 mm
Pin Diameter (D)	Φ60-Φ70 mm
Operating Pressure	30-150 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	200-260kg
Suitable Carrier	11-17 ton

FQC08	
Length (L)	1000-1050 mm
Height (H)	500-580 mm
Width (W)	450-560 mm
Pin Center (C)	400-510 mm
Arm Width (W1)	300-390 mm
Pin Diameter (D)	Φ80-Φ90 mm
Operating Pressure	30-200 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	340-380kg
Suitable Carrier	18-25 ton

FQC09	
Length (L)	1080-1150 mm
Height (H)	550-615 mm
Width (W)	530-640 mm
Pin Center (C)	500-580 mm
Arm Width (W1)	350-420 mm
Pin Diameter (D)	Φ90-Φ100 mm
Operating Pressure	30-200 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	530-580kg
Suitable Carrier	25-36 ton

FQC10	
Length (L)	1150-1250 mm
Height (H)	575-650 mm
Width (W)	580-650 mm
Pin Center (C)	570-600 mm
Arm Width (W1)	400-450 mm
Pin Diameter (D)	Φ100-Φ110 mm
Operating Pressure	30-200 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	700-760kg
Suitable Carrier	36-45 ton

FQC12	
Length (L)	1250-1350 mm
Height (H)	600-660 mm
Width (W)	630-700 mm
Pin Center (C)	590-650 mm
Arm Width (W1)	450-500 mm
Pin Diameter (D)	Φ110-Φ130 mm
Operating Pressure	30-200 Kg/cm ²
Oil Flow Range	10-30 L/min
Weight	750-850kg
Suitable Carrier	45-55 ton